

## Magnetically controlled Limit Switch

Bistable magnetic switch  
Reed contact  
Switch direction reversible

Product group **740**

Type **0065**

Sheet: 1/1

Revision: 9

Date:

2/08



Picture:  
Type 740.0065  
IP 67

### Field of Application

This switch is for signalling level limits with magnetic level gauges.  
The switch element Reed has a very low mass and so can sustain very high shock and vibration stress.  
By using only passive elements (Reed contact, resistors) the switch can operate in hazardous area zone 2 and as part of an intrinsic safe circuit also in zone 1.

### General Data

Hysteresis ca. [mm]:

Gauge Type	on basic pipe	on heating jacket
710.104/2XX	6	15
710.100	10	20
710.110...160	15	25

Fitting position: cable gland downwards  
Manner of fastening: with strap retainers  
Ingress protection: IP67  
Material housing: Alu  
Measures/weight: Alu: 75x80x57/0,3 kg

### Design Data

housing	max. temperature of pipe	temperature of housing
Alu	500 °C *) at amb. temp. 70 °C	-40 ... 120 °C

\*) Insulate between housing and pipe above 260 °C in pipe

Switch cycles: > 10<sup>6</sup>  
Shock: 15 g  
Vibration: 10 g


### Electrical Data

Switch voltage: 200 V =/230 V~  
Switch current: 0,5 A  
max. power limit: 5 W  
Connection: screw terminals, M20x1,5

### Accessories


Strap retainers for 710.104/2XX: 171538  
Strap retainers for 710.100/103: 171546  
Strap retainers for 710.110-130/106/100.3: 171553

subject to alterations

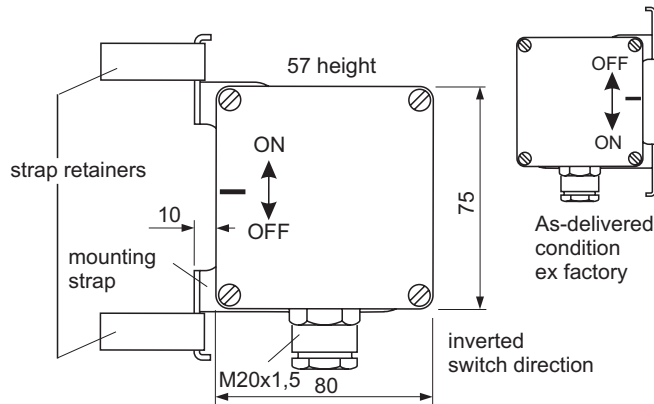

measures in mm

### Connection diagram

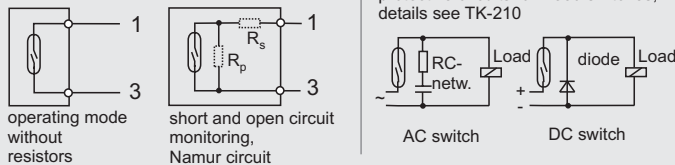

### Ordering no.

7 4 0 . 0 0 6 5 X X

A		without	Resistor circuit
N	A	with Namur circuit	
W	A	with short/open circuit monitoring	

### PHÖNIX

Messtechnik GmbH  
Salzschlirfer Straße 13  
D-60386 Frankfurt/M.  
Tel. +49/69/41 67 42 -20  
Fax +49/69/41 67 42 - 29  
sales@phoenix-mt.com  
www.phoenix-mt.com

# PHÖNIX